

# N1000 Network Interface Unit

## Integrated Outdoor Network and Power Unit

### Features & Benefits

- Range extension for shelter interconnect up to 2 km
- AC/DC converter - wide input voltage range
- Ruggedized network and power interfaces
- Antenna alignment aid
- Local and remote web-based management
- 1 Gbps switching capabilities
- Rugged, lightweight and easily transportable

The N1000 is an external switch and power unit, optional for the Ultra ORION family of radios, capable of up to 1 Gbps throughput. It is designed to be installed in harsh outdoor environments and has operator aids for networking and alignment. The network interface unit offers TFOCA-II or Stratos fiber connections for extensions up to 2 km. It facilitates deployments by providing operators with a ruggedized and reliable enclosure, designed to be lightweight and easily transportable. An optional transit case is also available.

The N1000 is capable of 1 Gbps switching and provides interfaces for external connections to the radio system. It includes AC to DC power conversion, an interconnection port for the Ultra ORION radio, 4 Gigabit Ethernet ports as well as an optional fiber port.


Three 10/100/1000 Mb/s RJ-45 Ethernet traffic PoE ports are available to the operator to use for external equipment and a fourth management port can be used to configure the radio. A TFOCA-II fiber port supporting either 100Base-FX (100 Mbps) or 1000Base-LX (1 Gbps) fiber connectivity depending on the N1000 variant is also possible enabling range extensions between the communications shelter and the radio mast of up to 2 km. A single data and power cable connects the network interface unit to the radio.



Alignment LEDs are available on the N1000 front panel, enabling simple and quick radio alignment for each of the Ultra ORION's two channels. Radio and N1000 status LEDs are also available to indicate the health of both units. The LEDs can optionally be muted.


N1000 network interface unit variants include:

- > N1000-LX (1000Base-LX optical SFP)
- > N1100-FX (100Base-FX optical SFP)
- > N1000-00 (without optical SFP)

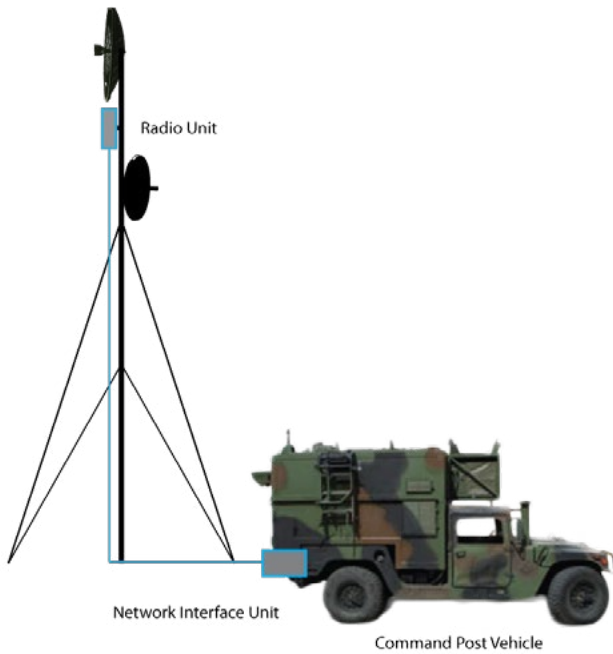

**Specifications**

Parameter	Specification
Input Voltage Range	88 to 264 VAC (47 to 63 Hz)
Physical Ports	1x Gigabit Ethernet inter-unit (network interface unit to radio) 3x Gigabit Ethernet Data LAN 1x Gigabit Ethernet Management LAN 1x USB maintenance port 1x Fiber port TFOCA-II or Stratos
PoE	802.3 at/af
Dimensions	7 x 8.7 x 13.4" (17.8 x 22.1 x 34 cm) (including handles and connectors)
Weight	16.5 lbs (7.5 kg)
Power Consumption	150W, 165VA max (interface network unit and radio powered) 305W, 340VA max (total, including all PoE active)
Operating External Temperature	-40 to +60°C (operating), -40 to +70°C (storage)
Environmental	MIL-STD-810G & 461F, IP67

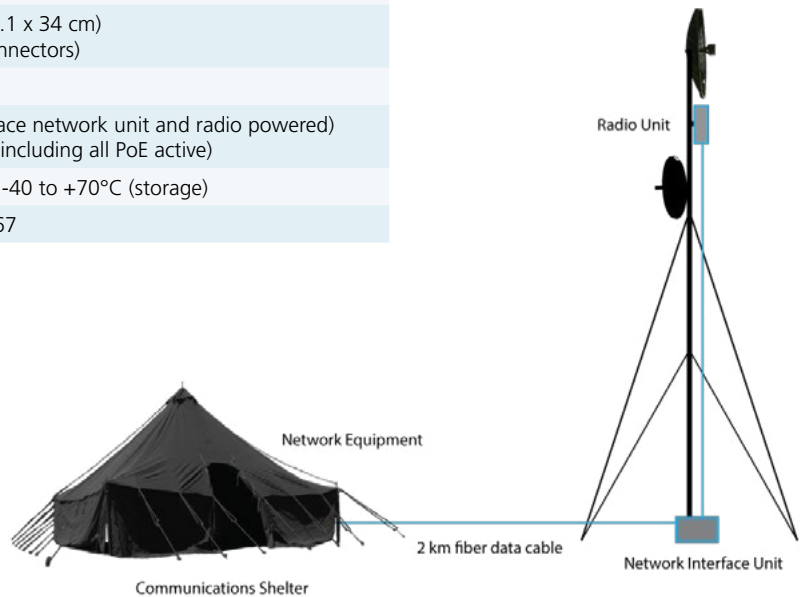

**Ultra Electronics**  
 TCS  
 5990 chemin Côte-de-Liesse  
 Montréal, Québec  
 H4T 1V7  
 Canada  
 tel: +1 514 855 6363  
 fax: +1 514 855 6357  
 email: info@ultra-tcs.com  
 www.ultra-tcs.com  
 www.ultra-electronics.com

Asia Pacific  
 Tel: +1 514 855 6599

Europe & South America  
 Tel: +1 514 855 6659

India  
 Tel: +91 9810884585

Middle East  
 Tel: +1 514 855 6255

USA  
 Tel: +1 800 370 4485

Ultra Electronics reserves the right to vary these specifications without notice.  
 © Ultra Electronics, TCS, Inc. 2014  
 Printed in Canada  
 6095-1400 2014-06-01